





SCHEDA TECNICA

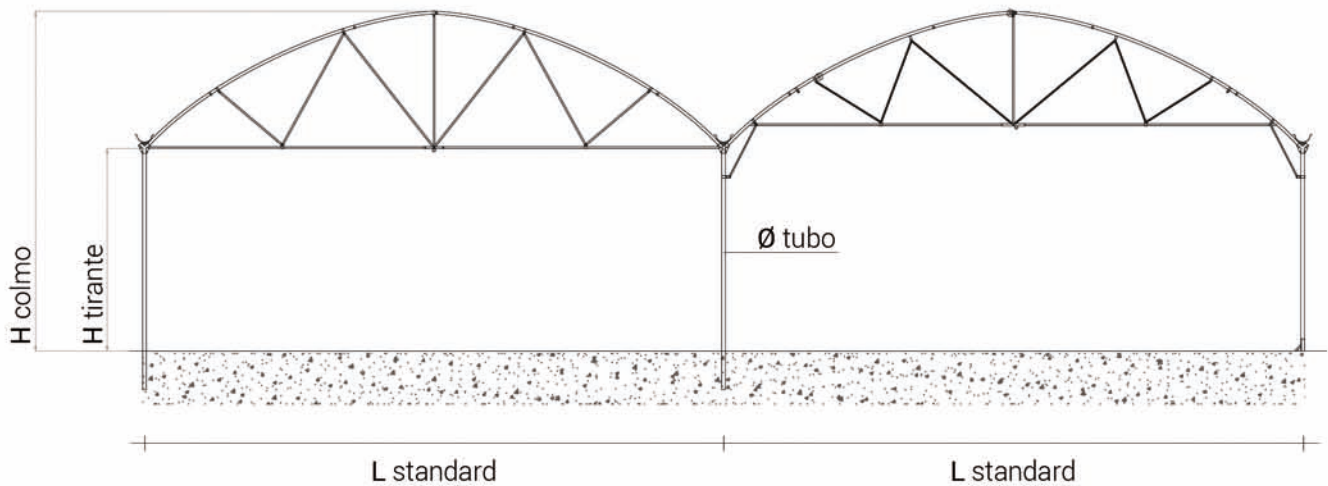


Fissaggio di base con calcestruzzo

- tubi a staffa Ø 70-82 
- tubo f.z. interno 
- piastre e tasselli 

L standard	Ø tubo	H tirante	H colmo
6.90 mt	60 mm	2.80 - 4.30 mt	4.20 - 5.40 mt
8.00 mt	60 mm	2.80 - 4.50 mt	4.65 - 6.50 mt
9.00 mt	60 mm	2.80 - 4.50 mt	4.95 - 7.00 mt
10.00 mt	60 mm	2.80 - 4.50 mt	4.90 - 6.90 mt
11.00 mt	76 mm	2.80 - 4.50 mt	5.20 - 6.40 mt
12.00 mt	76 mm	2.80 - 4.60 mt	5.60 - 7.50 mt
12.80 mt	88 mm	4.50 - 6.00 mt	8.15 - 9.65 mt

TESTATE CON PORTA

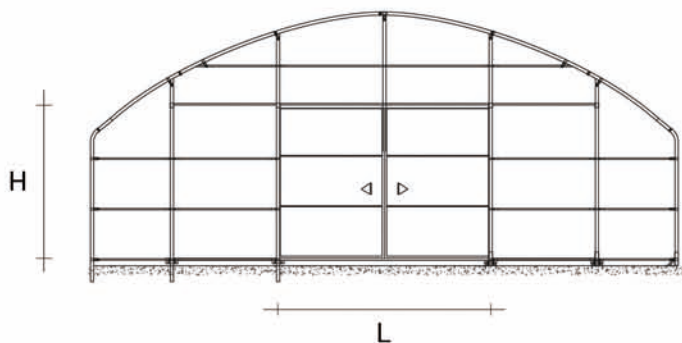

Dimensioni porta

L	H	Scorrevole
1.40 mt	2.21 mt	1 Anta
1.50 mt	2.56 mt	1 Anta
1.50 mt	2.86 mt	1 Anta
1.50 mt	3.16 mt	1 Anta
2.00 mt	2.21 mt	1 Anta
2.00 mt	2.86 mt	1 Anta
2.00 mt	3.16 mt	1 Anta
2.80 mt	2.21 mt	2 Ante
3.00 mt	2.56 mt	2 Ante
3.00 mt	2.86 mt	2 Ante
3.00 mt	3.16 mt	2 Ante
4.00 mt	2.21 mt	2 Ante
4.00 mt	2.86 mt	2 Ante
4.00 mt	3.16 mt	2 Ante
4.00 mt	3.60 mt	2 Ante

Tamponamento in policarbonato