



## GREENHOUSE WITH LIGHT STRAIGHT SIDEWALLS

Greenhouses with light straight sidewalls are cost-effective modular structures, designed to improve the protection and the exploitation of growing areas.

With Ø 33-40 round arched tubing, these greenhouses are in great demand in the plant and flower growing industry and among hobby growers, also due to their extremely short delivery periods and quick mounting.





## TECHNICAL SPECIFICATIONS

- Hot or Sendzimir Z 275 galvanized iron structure, highly resistant to corrosion
- Structure with or without tie-beam according to the place of installation or the type of crop
- Single long-lasting/anti-drip film covering
- Films fixed by means of aluminium profiles (wide range) and roll-up side tubes
- Possibility to include curved purlins and film or polycarbonate base frame
- Film or polycarbonate headends with hinged door
- Installation on the ground by means of piles (screw type, if required) or foundation
- 4.80 m wide structure, suitable for multi-span design, with middle clamps for gutter; for vegetables and small fruit (usually with roll-up headends)

### BASE FIXING

- Pegs
- Anchoring pegs

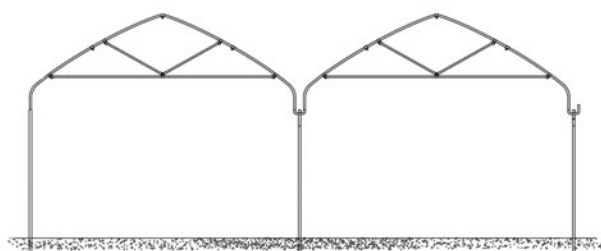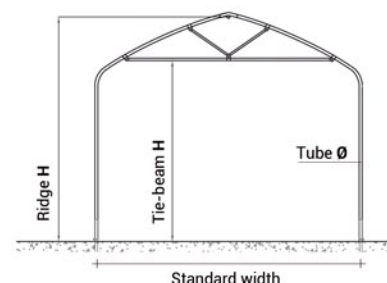

### LIGHT STRAIGHT SIDEWALLS

Standard width	Tube Ø	Tie-beam H	Ridge H
3.00 m	33 mm	2.05 m	2.60 m
4.20 m	33 mm	2.15 m	3.00 m
4.80 m	33 mm	2.80 m	4.00 m

Door dimensions	Hinged	Infill
1.00 x 2.00 m	Single	Film-Polycarb.
2.00 x 2.00 m	Single	Film-Polycarb.
Roll up		Film