





SCHEDA TECNICA

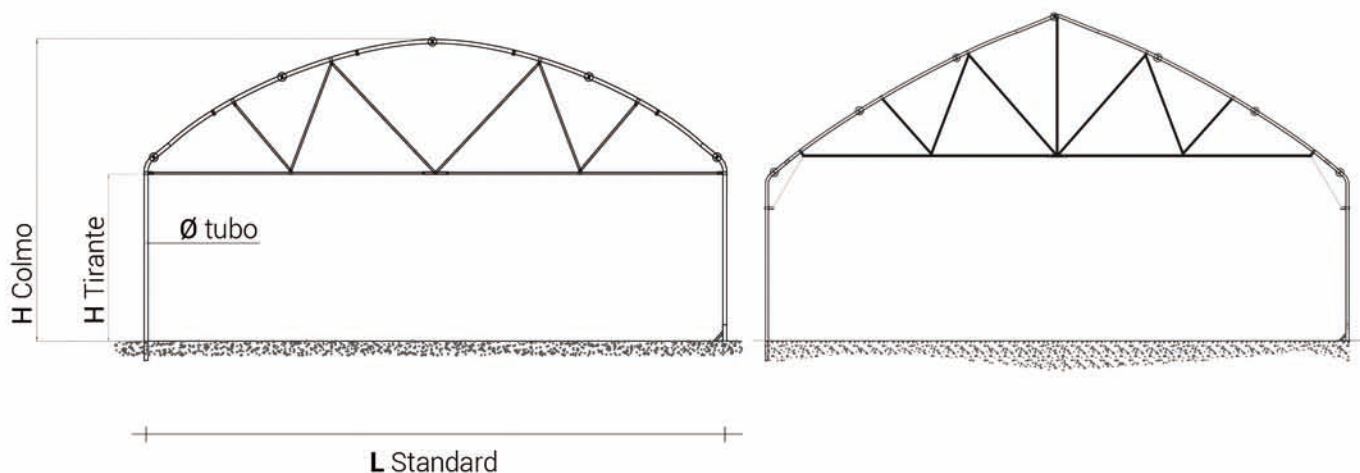


Fissaggio di base con calcestruzzo

- Tubi a staffa Ø 70 
- Tubo f.z. interno 
- Piastre e tasselli 

L Standard	Ø Tubo	H Tirante	H Colmo
3.00 mt	60 mm	2.28 - 3.05 mt	2.70 - 3.50 mt
3.50 mt	60 mm	2.40 - 3.90 mt	2.85 - 4.80 mt
4.00 mt	60 mm	2.20 - 3.50 mt	3.20 - 4.50 mt
5.00 mt	60 mm	2.65 - 4.30 mt	3.50 - 4.90 mt
6.40 mt	60 mm	2.30 - 4.00 mt	3.70 - 5.65 mt
6.90 mt	60 mm	2.40 - 4.70 mt	3.80 - 5.55 mt
8.00 mt	60 mm	2.40 - 4.10 mt	4.25 - 6.10 mt
9.00 mt	60 mm	2.30 - 4.10 mt	4.30 - 6.60 mt
10.00 mt	60 mm	2.30 - 4.10 mt	4.50 - 6.60 mt
11.00 mt	76 mm	2.30 - 4.10 mt	4.80 - 6.90 mt
12.00 mt	76 mm	2.80 - 4.30 mt	5.60 - 7.20 mt
12.80 mt	88 mm	4.50 - 6.00 mt	8.15 - 9.65 mt

TESTATE CON PORTA

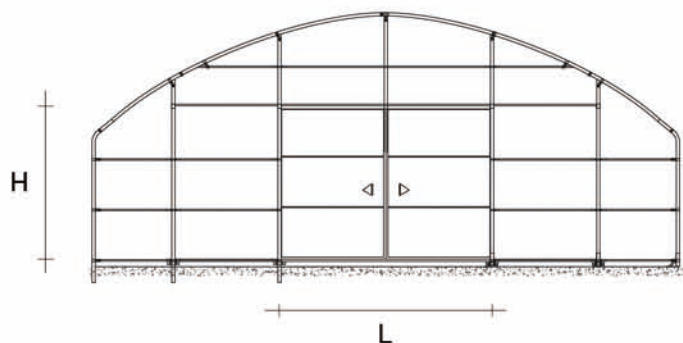

Dimensione porta

L	H	Scorrevole
1.40 mt	2.21 mt	1 Anta
1.50 mt	2.56 mt	1 Anta
1.50 mt	2.86 mt	1 Anta
1.50 mt	3.16 mt	1 Anta
2.00 mt	2.21 mt	1 Anta
2.00 mt	2.86 mt	1 Anta
2.00 mt	3.16 mt	1 Anta
2.80 mt	2.21 mt	2 Ante
3.00 mt	2.56 mt	2 Ante
3.00 mt	2.86 mt	2 Ante
3.00 mt	3.16 mt	2 Ante
4.00 mt	2.21 mt	2 Ante
4.00 mt	2.86 mt	2 Ante
4.00 mt	3.16 mt	2 Ante

Tamponamento in policarbonato